

Manta G-201-30fps



Description

GiGE Vision camera, 2 Megapixels and 30 fps, Sony ICX274, PoE option



The Manta G-201B/C-30fps is a fast GigE Vision camera with a Sony ICX274 sensor. It runs at 30 fps (full resolution). With a smaller ROI, higher frame rates are possible. It incorporates three LUTs, sophisticated color correction algorithms, a robust metal housing, and many modular options like angled heads or board level versions. Manta cameras cover a wide range of imaging applications. The Manta is optionally available with PoE (Power over Ethernet).

- Sony ICX274 (type 1/1.8), 2 Megapixels
- Sync modes
 - Trigger ready, trigger input, exposing, readout, imaging, strobe, GPO
- Trigger
 - External trigger event: rising/falling/any edge, level high/low
 - External trigger delay: 0 to 60 seconds in 1 μ s increments
- Modular options
 - Various IR cut/pass filters
 - CS-Mount
 - Board level version
 - Angled head
 - White medical housing
 - PoE (Power over Ethernet)

Specifications

Manta	G-201-30fps
Interface	IEEE 802.3 1000baseT
Resolution	1624 x 1234
Sensor	Sony ICX274
Sensor type	CCD Progressive
Sensor size	Type 1/1.8
Cell size	4.4 μm
Lens mount	C/CS-Mount
Max frame rate at full resolution	30 fps
A/D	14 bit
On-board FIFO	32 MB
	Output
Bit depth	8-12 bit
Mono modes	Mono8, Mono12, Mono12Packed
Color modes YUV	YUV411, YUV422, YUV444
Color modes RGB	RGB24, BGR24
Raw modes	BayerRG8, BayerRG12, BayerRG12Packed
	General purpose inputs/outputs (GPIOs)
Opto-coupled I/Os	2 inputs, 2 outputs
RS-232	1
	Operating conditions/Dimensions
Operating temperature	+5 °C ... +45 °C
Power requirements (DC)	8 V - 30 V
Power consumption (12 V)	<4.5 W (PoE) / 4.6 W (non-PoE)
Mass	<200 g
Body Dimensions (L x W x H in mm)	86.4 x 44 x 29 mm incl. connectors
Regulations	CE, FCC Class B, RoHS

[Download Manta technical drawing \(click here\)](#)

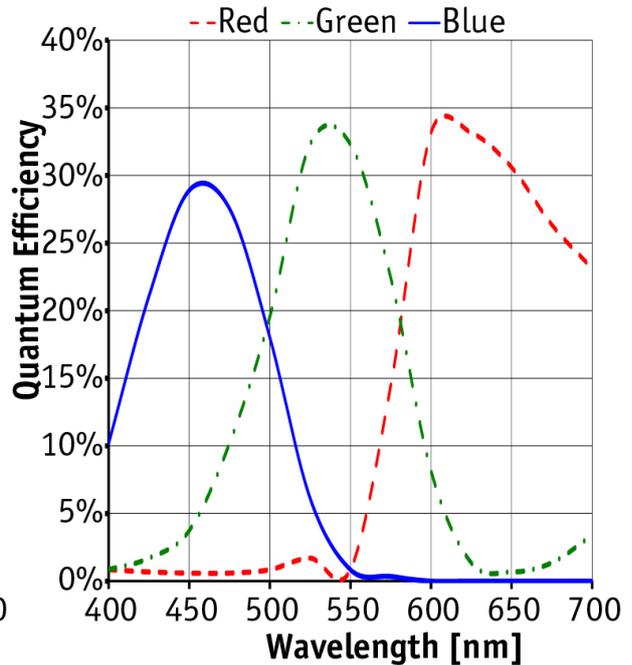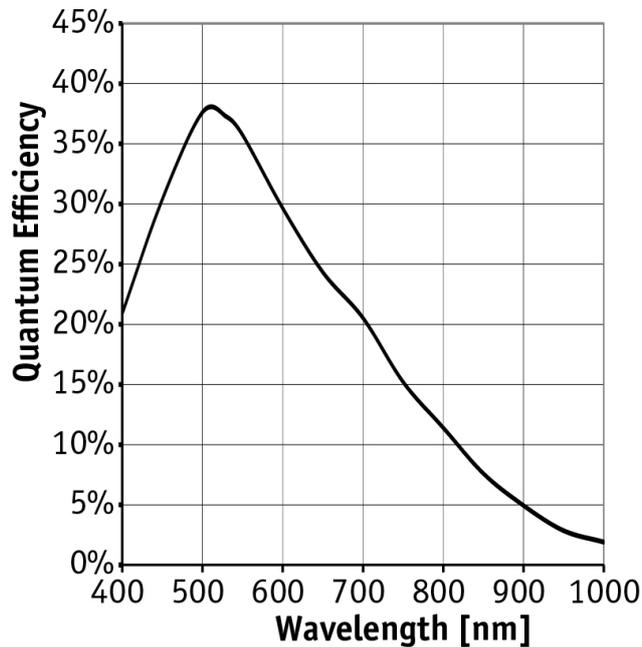

Smart features

- ROI (Region of Interest Readout)
- Exposure
 - Auto/one push/programmable
 - Exposure time 10 μ s to 60 s
- White balance
 - Auto/one push/programmable
- On-board debayering
- Hue, saturation, sharpness (color versions)
- Gain
 - Auto/one push/programmable
 - Manual gain control: 0 to 31 dB (1 dB/step)
- Three look-up tables (LUTs), gamma correction
- DSP subregion (selectable ROI for auto features)
- Binning (up to 8 x 14, independent x and y binning)
- Sub-sampling (decimation)
- Stream hold
- StreamBytesPerSecond (easy bandwidth control)
- Event channel
- Chunk data
- 5 storable user sets

Applications

The Manta G-201B/C-30fps is a fast GigE Vision camera with PoE option. Thanks to its flexibility (angled head, board level version with separate sensor head), it can be used for a variety of applications. The Manta incorporates three LUTs (separate R, G, and B control), color correction, and many more features.

Typical applications:

- Machine vision
- ITS (Intelligent Traffic Solutions)
- Entertainment and multimedia applications
- 3D applications
- ITS (Intelligent traffic solutions)
- ... and many more