

# Prosilica GT

## 1930L



- Versatile temperature range for extreme environments
- Latest Sony CMOS sensor
- PTP and PoE
- EF lens control

## Description

2.4 Megapixel CMOS camera for extreme environments - GigE Vision®

Prosilica GT1930L is a 2.4 Megapixel camera with a Gigabit Ethernet interface (GigE Vision®). GT1930L incorporates latest Sony IMX174 CMOS global shutter sensor providing excellent monochrome and color image quality. GT1930L is a rugged camera designed to operate in extreme environments. GT1930L is available with planarity adjustable EF-Mount.



Options:

- Various IR cut/pass filters and lens mounts

## Specifications

Prosilica GT	1930L
Interface	IEEE 802.3 1000BASE-T, IEEE 802.3af (PoE)
Resolution	1936 × 1216
Sensor	Sony IMX174
Sensor type	CMOS Progressive
Cell size	5.86 μm
Lens mount	EF-Mount
Max frame rate at full resolution	50.7 fps
ADC	12 bit
On-board FIFO	128 Mbyte
<b>Output</b>	
Bit depth	12 bit
Mono modes	Mono8, Mono12Packed, Mono12
Color modes YUV	YUV411Packed, YUV422Packed, YUV444Packed
Color modes RGB	RGB8Packed, BGR8Packed
Raw modes	BayerRG8, BayerRG12

Prosilica GT	1930L
<b>General purpose inputs/outputs (GPIOs)</b>	
TTL I/Os	1 input, 2 outputs
Opto-isolated I/Os	1 input, 2 outputs
RS-232	1
<b>Operating conditions/dimensions</b>	
Operating temperature	-30°C ... +70°C Housing temperature
Power requirements (DC)	PoE, or 7-25 VDC
Power consumption (@12 V)	3.88 W (PoE) / 3.24 W @12 VDC
Mass	372 g
Body dimensions (L × W × H in mm)	96 × 66 × 53.3 (including connectors, w/o tripod and lens)
Regulations	CE, FCC Class A, RoHS (2011/65/EU)

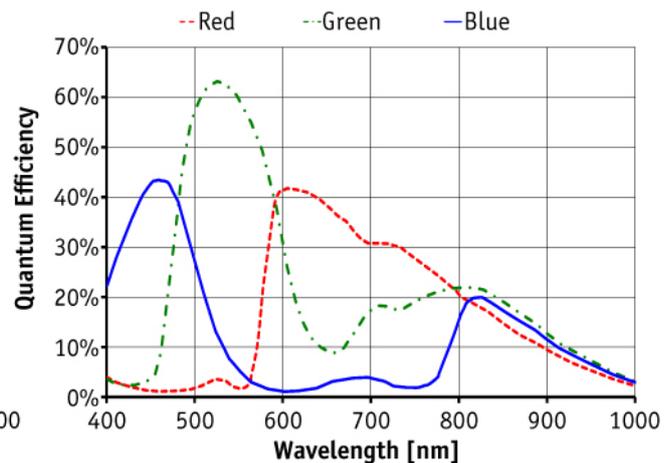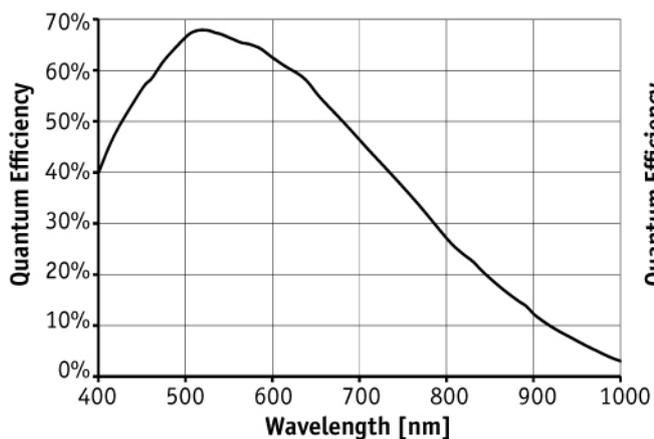

## Features


Prosilica GT1930L features include:

- Precision Time Protocol (IEEE 1588)
- Camera temperature monitoring
- EF lens control
- ROI, separate ROI for auto features
- Binning
- Decimation



- ReverseX/Y
- Auto gain (manual gain control: 0 to 40 dB)
- Auto exposure
- Auto white balance
- LUTs (look-up tables)
- Gamma
- Hue, saturation, color correction
- StreamBytesPerSecond (easy bandwidth control)
- Stream hold
- Sync out modes: Trigger ready, input, exposing, readout, imaging, strobe, GPO
- Event channel
- Chunk data
- Storable user sets

## Technical drawing

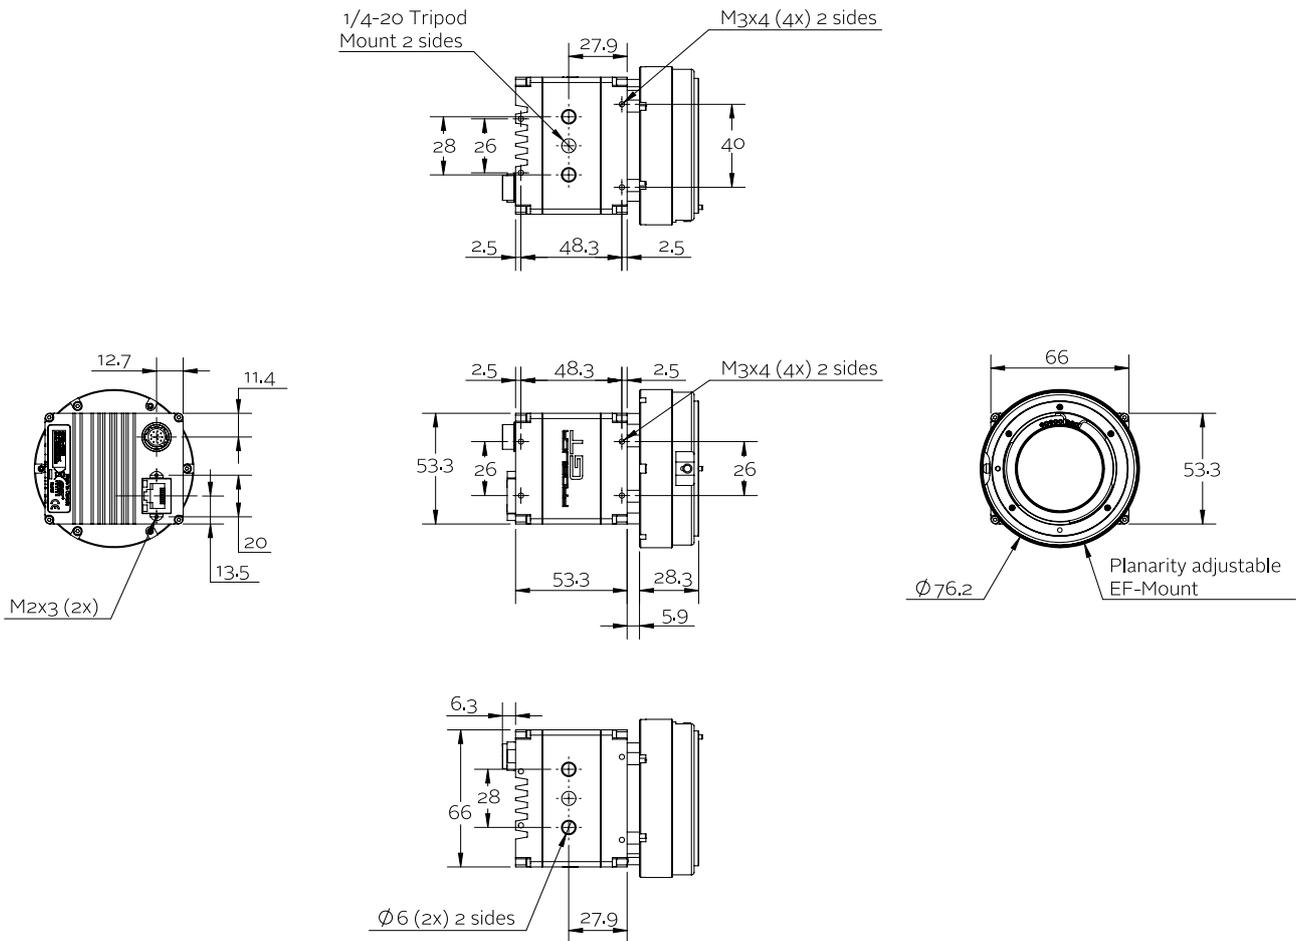

## Applications

Prosilica GT1930L is ideal for a wide range of applications including:



- Outdoor imaging
- Traffic imaging / ITS
- Public security and surveillance
- Industrial inspection
- Machine vision
- Military and space applications