



**GANZ**  
**THERMAL**  
POWERED BY DRS TECHNOLOGIES

Security Driven by Intelligence.

- > 320 x 240 or 640 x 480 resolution
- > Lens options ranging from 6° to 90° FOV
- > Image Contrast Enhancement (ICE™) features
- > Thermal imaging powered by DRS Technologies®
- > IP and analog connectivity
- > 30 fps or 9 fps versions for global commercial applications
- > 802.3af Power over Ethernet (PoE)
- > Low energy consumption
- > Uncooled 17um VOx Detector



# Thermal Imaging: There Is No Comparison

The diagram below depicts images from the same scene captured with various imaging equipment common in today's surveillance market. Conventional video surveillance options such as CCTV with Infrared Illuminators, Active Visible (Day TV) and Image Intensifiers (i2) cannot adequately define the scene with clarity, as thermal cameras can.

Several types of imaging technologies are available for security applications, but thermal cameras offer particular advantages that can extend the surveillance and monitoring capabilities of security systems and personnel. All competing technologies – visible-light camera, night vision and near-infrared – have limited viewing capacity.

## Ganz Thermal Infrared




These low-light devices amplify the available ambient light to produce an image of the scene. Consequently, image intensifiers need a source of illumination to operate effectively and cannot perform well in total darkness. Their effectiveness also is hampered by their limited range. Image intensifiers are subject to a "blooming" effect that results from brightly lit objects in the scene. These light sources appear as intense glows that may hide nearby detail and, if sufficiently strong, may blind the camera by flooding the scene with light.

## Image Intensifier (i2)




## CCTV with Infrared Illuminator

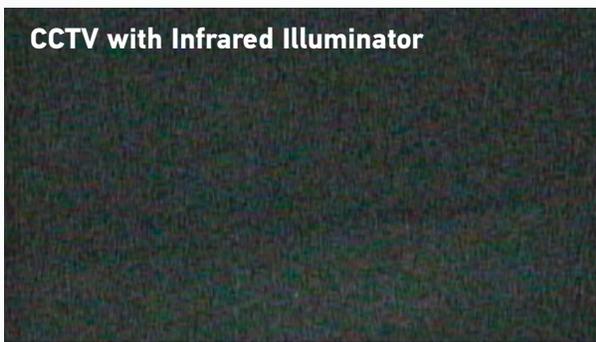

For security operations, closed circuit TV systems are often coupled with infrared illuminators, such as diodes, infrared lamps and lasers. With these illuminators, CCTV offers an improvement in imaging compared with day TV devices, but it still requires enhanced illumination when detecting images in semi-darkness and other low-light conditions. Additionally, CCTV's capabilities often are limited by range and weather conditions.

## Active Visible Lighting (Day TV)

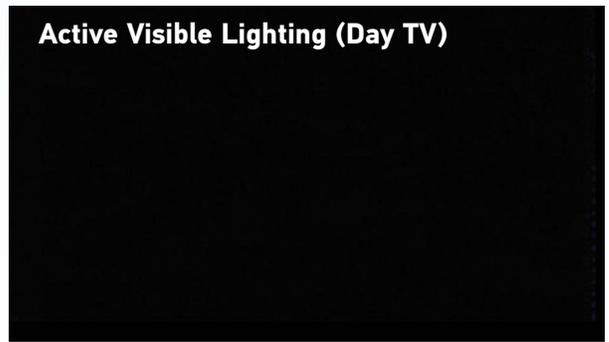

Day cameras, employing active visible lighting, detect the portion of the electromagnetic spectrum that is visible to the human eye, a segment ranging from 350 nm to 750 nm in wavelength. Using conventional video cameras, these systems splash light on the targeted area to identify intrusions. The light source, however, draws attention to the device, and intruders may breach security simply by evading the light. Moreover, as with any illuminated source, visible-lighting systems are hindered by limited reliability and duration for both the camera and the lighting source.

## Image Contrast Enhancement (ICE™) Selections



### AGC

Firefighter is visible with minimal contrast. Background of scene is washed out and nothing is visible through the window.



### ICE™ Low

Firefighter and background are clearly visible with added contrast and edge enhancement. No visibility through the window.



### ICE™ High

Maximum edge enhancement brings out details of firefighter and reveals elements in the distant background through the window.

**AGC-** Automatic Gain Control adjusts the image gain to the optimal range.

**ICE™ Low-** Provides moderate levels of contrast and edge enhancement.

**ICE™ High-** Additional local area contrast and edge enhancement to enrich background and foreground content.

## Mounting Options

### Pan/Tilt mounting:

**WMK3-1W**  
Wall Mount Bracket



### Fixed mounting:

**WB-1W**  
Wall Mount Bracket



**JB-1W**  
Ceiling J Bracket



# Fixed Thermal Series

Powered by DRS Technologies®



## ZNT6-H SERIES FEATURES

### FOCAL PLANE ARRAY

|                   |  |           |
|-------------------|--|-----------|
| Array Size        | 320 x 240                                    | 640 x 480 |
| Detector Type     | DRS Technologies Uncooled VOx Microbolometer |           |
| Detector Pitch    | 17 µm  |           |
| Spectral Response | 8 – 14 µm (LWIR)                             |           |
| Sensitivity       | < 50 mK at f/1.0                             |           |

### VIDEO

|                       |   |
|-----------------------|---|
| Frame Rate            | Configurable for up to 30 Frames Per Second (FPS) or Fixed at 9 fps |
| Format                | Analog: NTSC / PAL<br>IP: H264 / MJPEG                              |
| Gain/Level Control    | Automatic   |
| Thermal Image Display | White Hot / Black Hot / Color Pallet with more than 12 options      |
| Image Orientation     | Normal / Flip   |
| Symbology             | On screen display with date, time and user defined text             |
| Zoom                  | 4x Digital Zoom with ePan / eTilt                                   |
| Image Processing      | Image Contrast Enhancement (ICE™)                                   |

### COMMUNICATION INTERFACE

|            |   |
|------------|---|
| Protocols  | Internet Protocol (IP): ONVIF™ Conformant (v2.0 / Profile S)<br>RTP, RTSP, TCP, UDP, DHCP, FTP, HTTP and NTP<br>Analog: PELCO-D |
| Interfaces | Internet Protocol (IP): Ethernet (10/100 BaseT), RJ-45<br>Analog: RS-485  |
| Security   | 802.1X Network Access Control and HTTPS   |

### ELECTRICAL

|                   |   |
|-------------------|---|
| Voltage           | 12 - 24 VDC; 24 VAC; 802.3af Power over Ethernet (PoE), UL Listed |
| Power Consumption | < 12.95 W   |

### ENVIRONMENTAL

|                       |                                  |
|-----------------------|----------------------------------|
| Operating Temperature | -40°F to +140°F (-40°C to +60°C) |
| Storage Temperature   | -58°F to +167°F (-50°C to +75°C) |

### MECHANICAL

|                        |  |
|------------------------|--|
| Dimensions (L x H x W) | 11.5" x 4.1" x 3.7" (29.2 x 10.4 x 9.5 cm) |
| Weight                 | < 3.3 lbs. (1500 grams)                    |
| Enclosure              | IP66, Tamper Resistant                     |

### SOFTWARE

|               |   |
|---------------|---|
| Web Interface | Administrator and User with Password Protection |
|---------------|---|

### HARDWARE

|                 |  |
|-----------------|--|
| Embedded Memory | 2 GB for Video Storage and Image Capture |
|-----------------|--|



Specifications subject to change without notice.

Mounting options can be found on page 3. Lens options can be found on page 6 and 8.

# Pan / Tilt Thermal Series

Powered by DRS Technologies®



## ZNT6-P SERIES FEATURES

### FOCAL PLANE ARRAY

|                   |  |           |
|-------------------|--|-----------|
| Array Size        | 320 x 240                                    | 640 x 480 |
| Detector Type     | DRS Technologies Uncooled VOx Microbolometer |           |
| Detector Pitch    | 17 µm  |           |
| Spectral Response | 8 – 14 µm (LWIR)                             |           |
| Sensitivity       | < 50 mK at f/1.0                             |           |

### VIDEO

|                       |   |
|-----------------------|---|
| Frame Rate            | Configurable for up to 30 Frames Per Second (FPS) or Fixed at 9 fps |
| Format                | Analog: NTSC / PAL<br>IP: H264 / MJPEG                              |
| Gain/Level Control    | Automatic   |
| Thermal Image Display | White Hot / Black Hot / Color Pallet with more than 12 options      |
| Image Orientation     | Normal / Flip   |
| Symbology             | On screen display with date, time and user defined text             |
| Zoom                  | 4x Digital Zoom with ePan / eTilt                                   |
| Image Processing      | Image Contrast Enhancement (ICE™)                                   |

### COMMUNICATION INTERFACE

|            |   |
|------------|---|
| Protocols  | Internet Protocol (IP): ONVIF™ Conformant (v2.0 / Profile S)<br>RTP, RTSP, TCP, UDP, DHCP, FTP, HTTP and NTP<br>Analog: PELCO-D |
| Interfaces | Internet Protocol (IP): Ethernet (10/100 BaseT), RJ-45<br>Analog: RS-485  |
| Security   | 802.1X Network Access Control and HTTPS   |

### ELECTRICAL

|                   |   |
|-------------------|---|
| Voltage           | 12 - 24 VDC; 24 VAC; 802.3af Power over Ethernet (PoE), UL Listed |
| Power Consumption | < 12.95 W   |

### ENVIRONMENTAL

|                       |                                  |
|-----------------------|----------------------------------|
| Operating Temperature | -4°F to +140°F (-20°C to +60°C)  |
| Storage Temperature   | -58°F to +167°F (-50°C to +75°C) |

### MECHANICAL

|                    |   |
|--------------------|---|
| Dimensions (ø x H) | 7.9" x 10.6" (20 cm x 27 cm)  |
| Volume             | 480 cubic inches (8000 cm <sup>3</sup> )  |
| Weight             | < 6.6 lbs. (3 kilograms)  |
| Enclosure          | IP66 (Ball-down Configuration), Tamper Resistant  |
| Motion Mechanics   | Pan Range (Azimuth): Continuous 360°<br>Tilt Range (Elevation): ± 120°<br>Pan-and-Tilt Speed: 30° per second<br>Pan-and-Tilt Accuracy: ± 2.5° |

### SOFTWARE


|               |   |
|---------------|---|
| Web Interface | Administrator and User with Password Protection |
|---------------|---|

### HARDWARE

|                 |  |
|-----------------|--|
| Embedded Memory | 2 GB for Video Storage and Image Capture |
|-----------------|--|

# Thermal Series Range Performance Data - at 50% Probability


## Lens Configuration

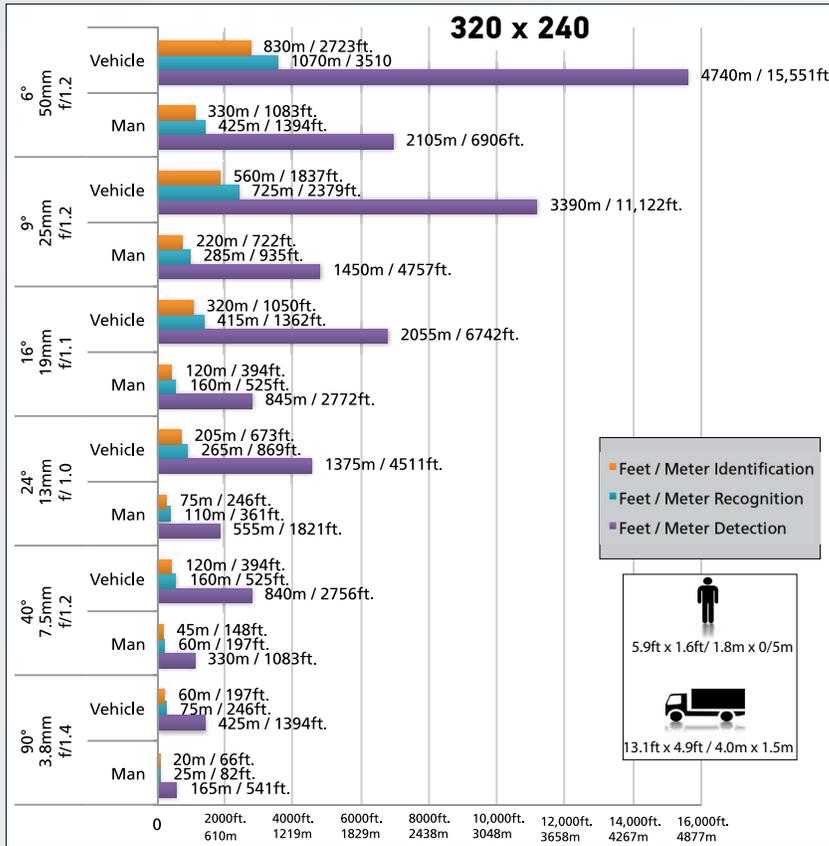

NVTherm IP 2009: Modeled inputs include actual detector NETD ( $\leq 30mK$ ), Lens (EFL, MTF,f/#,Transmission),  $2^\circ\Delta T$  (target vs. background) Atmospheric Transmission 90% @ 1Km, Image viewed in its native resolution no scaling, no e-zoom applied. Other factors and assumptions apply.

See page 8 for full list of camera models and lens options. Some lenses are not available on all models.

## Lens Configuration

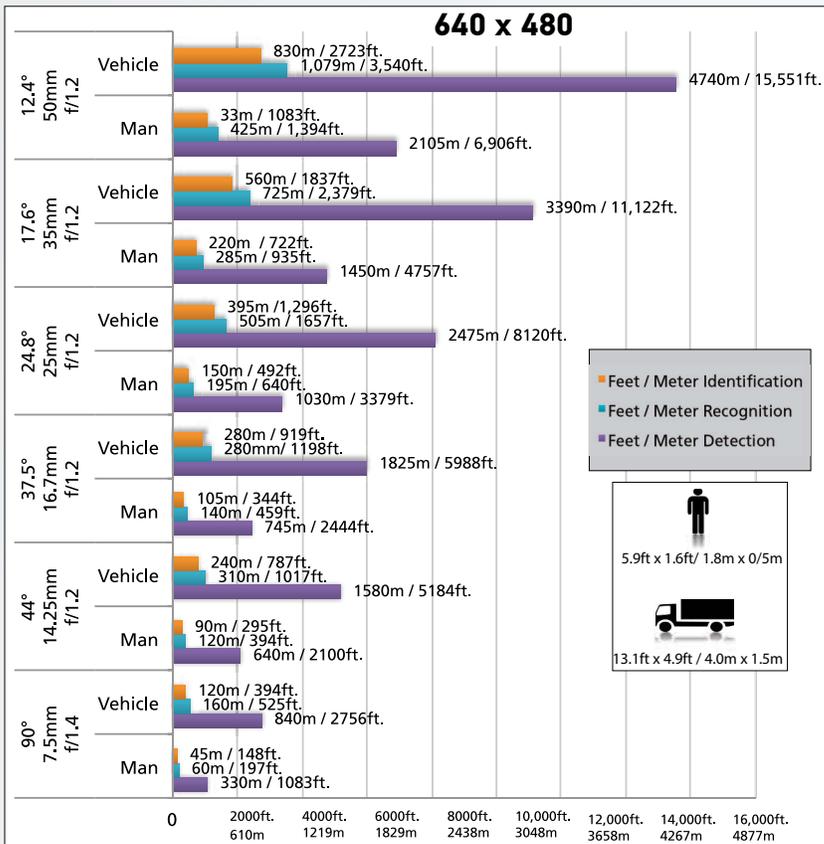


NVTherm IP 2009: Modeled inputs include actual detector NETD ( $\leq 30mK$ ), Lens (EFL, MTF,f/#,Transmission),  $2^\circ\Delta T$  (target vs. background) Atmospheric Transmission 90% @ 1Km, Image viewed in its native resolution no scaling, no e-zoom applied. Other factors and assumptions apply.

# Environmental Testing Data

All tests listed below were conducted on the Ganz Thermal Fixed and Ganz Thermal Pan / Tilt cameras. The cameras passed all tests.

## SYSTEM FEATURES

| Test                          | Conditions  |
|-------------------------------|---|
| Altitude                      | Operational 500 to 9,000 feet   |
| Operational Temperature       | Fixed Thermal Series: -40°C to 60°C (-40°F to 140°F)<br>Pan / Tilt Series: -20°C to 60°C (-4°F to 140°F)  |
| Storage Temperature           | Fixed Thermal Series: -50°C to 75°C (-58°F to 167°F)<br>Pan / Tilt Series: -50°C to 75°C (-58°F to 167°F)   |
| Temperature Shock             | Fixed Thermal Series: -40°C to 60°C (-40°F to 140°F) and 60°C to -40°C (140°F to -40°F)<br>Pan / Tilt Series: -20°C to 60°C (-4°F to 140°F) and 60°C to -20°C (140°F to -4°F) |
| Icing, Fogging, Frosting      | Fixed Thermal Series: -40°C to 40°C (-40°F to 104°F), 2 Hrs at 2°C per minute<br>Pan / Tilt Series: -20°C to 40°C (-4°F to 104°F), 2 Hrs at 2°C per minute                    |
| Solar Radiation               | 60°C (inherent in high temp extreme)  |
| Humidity                      | 95% humidity 7 days   |
| Salt Fog                      | 5% solution for 48 hours  |
| Protection for Water and Dust | IEC 60529 IP66  |
| Functional Vibration          | 20Hz to 600Hz   |
| Handling Shock                | 1 meter drop; 3 sides (in shipping container)   |
| EMI Testing                   | FCC Part 15 Subpart B Class A, CISPR22 Class B, EN55022 Class A   |
| Safety                        | UL 60065 7th Edition 2007-12-11, CAN/CSA-C22.2 No.60065-03, 1st Edition, 2006-04+A1:2006  |
| RoHS Compliance               | European RoHS directive, 2011/65/EU   |
| CE Mark Certification         | IEC 60065 (Edition 7), IEC 60065 (Edition 7) Am 1   |

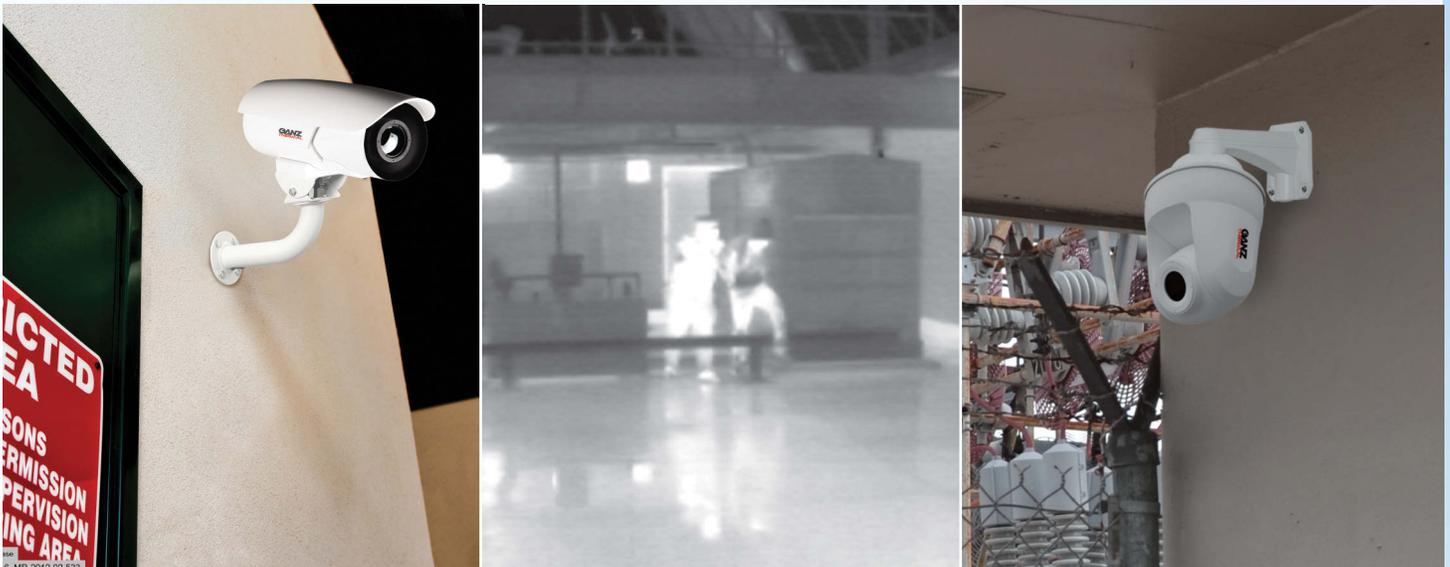

2 Year Warranty. See website for details

## Fixed Thermal Series



| Fixed Thermal - 320x240 Resolution |     |           |          |
|------------------------------------|-----|-----------|----------|
| Models                             | fps | FOV       | Standard |
| ZNT6-HAT1FN32-N                    | 30  | 90° x 67° | NTSC     |
| ZNT6-HAT1FN20-N                    | 30  | 40° x 30° | NTSC     |
| ZNT6-HAT1FN29-N                    | 30  | 24° x 18° | NTSC     |
| ZNT6-HAT1FN23-N                    | 30  | 16° x 12° | NTSC     |
| ZNT6-HAT1FN25-N                    | 30  | 9° x 7°   | NTSC     |
| ZNT6-HAT1FN26-N                    | 30  | 6° x 5°   | NTSC     |
| ZNT6-HBT1FN32-N                    | 9   | 90° x 67° | NTSC     |
| ZNT6-HBT1FN20-N                    | 9   | 40° x 30° | NTSC     |
| ZNT6-HBT1FN29-N                    | 9   | 24° x 18° | NTSC     |
| ZNT6-HBT1FN23-N                    | 9   | 16° x 12° | NTSC     |
| ZNT6-HBT1FN25-N                    | 9   | 9° x 7°   | NTSC     |
| ZNT6-HBT1FN26-N                    | 9   | 6° x 5°   | NTSC     |
| ZNT6-HAT1FN32-P                    | 30  | 90° x 67° | PAL      |
| ZNT6-HAT1FN20-P                    | 30  | 40° x 30° | PAL      |
| ZNT6-HAT1FN29-P                    | 30  | 24° x 18° | PAL      |
| ZNT6-HAT1FN23-P                    | 30  | 16° x 12° | PAL      |
| ZNT6-HAT1FN25-P                    | 30  | 9° x 7°   | PAL      |
| ZNT6-HAT1FN26-P                    | 30  | 6° x 5°   | PAL      |
| ZNT6-HBT1FN32-P                    | 9   | 90° x 67° | PAL      |
| ZNT6-HBT1FN20-P                    | 9   | 40° x 30° | PAL      |
| ZNT6-HBT1FN29-P                    | 9   | 24° x 18° | PAL      |
| ZNT6-HBT1FN23-P                    | 9   | 16° x 12° | PAL      |
| ZNT6-HBT1FN25-P                    | 9   | 9° x 7°   | PAL      |
| ZNT6-HBT1FN26-P                    | 9   | 6° x 5°   | PAL      |

| Fixed Thermal - 640x480 Resolution |     |           |          |
|------------------------------------|-----|-----------|----------|
| Models                             | fps | FOV       | Standard |
| ZNT6-HAT2FN32-N                    | 30  | 90° x 67° | NTSC     |
| ZNT6-HAT2FN21-N                    | 30  | 44° x 33° | NTSC     |
| ZNT6-HAT2FN22-N                    | 30  | 37° x 28° | NTSC     |
| ZNT6-HAT2FN24-N                    | 30  | 25° x 19° | NTSC     |
| ZNT6-HAT2FN25-N                    | 30  | 18° x 13° | NTSC     |
| ZNT6-HAT2FN26-N                    | 30  | 12° x 9°  | NTSC     |
| ZNT6-HBT2FN32-N                    | 9   | 90° x 67° | NTSC     |
| ZNT6-HBT2FN21-N                    | 9   | 44° x 33° | NTSC     |
| ZNT6-HBT2FN22-N                    | 9   | 37° x 28° | NTSC     |
| ZNT6-HBT2FN24-N                    | 9   | 25° x 19° | NTSC     |
| ZNT6-HBT2FN25-N                    | 9   | 18° x 13° | NTSC     |
| ZNT6-HBT2FN26-N                    | 9   | 12° x 9°  | NTSC     |
| ZNT6-HAT2FN32-P                    | 30  | 90° x 67° | PAL      |
| ZNT6-HAT2FN21-P                    | 30  | 44° x 33° | PAL      |
| ZNT6-HAT2FN22-P                    | 30  | 37° x 28° | PAL      |
| ZNT6-HAT2FN24-P                    | 30  | 25° x 19° | PAL      |
| ZNT6-HAT2FN25-P                    | 30  | 18° x 13° | PAL      |
| ZNT6-HAT2FN26-P                    | 30  | 12° x 9°  | PAL      |
| ZNT6-HBT2FN32-P                    | 9   | 90° x 67° | PAL      |
| ZNT6-HBT2FN21-P                    | 9   | 44° x 33° | PAL      |
| ZNT6-HBT2FN22-P                    | 9   | 37° x 28° | PAL      |
| ZNT6-HBT2FN24-P                    | 9   | 25° x 19° | PAL      |
| ZNT6-HBT2FN25-P                    | 9   | 18° x 13° | PAL      |
| ZNT6-HBT2FN26-P                    | 9   | 12° x 9°  | PAL      |

## Pan / Tilt Thermal Series



| P/T Thermal - 320x240 Resolution |     |           |          |
|----------------------------------|-----|-----------|----------|
| Models                           | fps | FOV       | Standard |
| ZNT6-PAT1FN20-N                  | 30  | 40° x 30° | NTSC     |
| ZNT6-PAT1FN29-N                  | 30  | 24° x 18° | NTSC     |
| ZNT6-PAT1FN23-N                  | 30  | 16° x 12° | NTSC     |
| ZNT6-PAT1FN25-N                  | 30  | 9° x 7°   | NTSC     |
| ZNT6-PBT1FN20-N                  | 9   | 40° x 30° | NTSC     |
| ZNT6-PBT1FN29-N                  | 9   | 24° x 18° | NTSC     |
| ZNT6-PBT1FN23-N                  | 9   | 16° x 12° | NTSC     |
| ZNT6-PBT1FN25-N                  | 9   | 9° x 7°   | NTSC     |
| ZNT6-PAT1FN20-P                  | 30  | 40° x 30° | PAL      |
| ZNT6-PAT1FN29-P                  | 30  | 24° x 18° | PAL      |
| ZNT6-PAT1FN23-P                  | 30  | 16° x 12° | PAL      |
| ZNT6-PAT1FN25-P                  | 30  | 9° x 7°   | PAL      |
| ZNT6-PBT1FN20-P                  | 9   | 40° x 30° | PAL      |
| ZNT6-PBT1FN29-P                  | 9   | 24° x 18° | PAL      |
| ZNT6-PBT1FN23-P                  | 9   | 16° x 12° | PAL      |
| ZNT6-PBT1FN25-P                  | 9   | 9° x 7°   | PAL      |

| P/T Thermal - 640x480 Resolution |     |           |          |
|----------------------------------|-----|-----------|----------|
| Models                           | fps | FOV       | Standard |
| ZNT6-PAT2FN21-N                  | 30  | 44° x 33° | NTSC     |
| ZNT6-PAT2FN22-N                  | 30  | 37° x 28° | NTSC     |
| ZNT6-PAT2FN24-N                  | 30  | 25° x 19° | NTSC     |
| ZNT6-PAT2FN25-N                  | 30  | 18° x 13° | NTSC     |
| ZNT6-PBT2FN21-N                  | 9   | 44° x 33° | NTSC     |
| ZNT6-PBT2FN22-N                  | 9   | 37° x 28° | NTSC     |
| ZNT6-PBT2FN24-N                  | 9   | 25° x 19° | NTSC     |
| ZNT6-PBT2FN25-N                  | 9   | 18° x 13° | NTSC     |
| ZNT6-PAT2FN21-P                  | 30  | 44° x 33° | PAL      |
| ZNT6-PAT2FN22-P                  | 30  | 37° x 28° | PAL      |
| ZNT6-PAT2FN24-P                  | 30  | 25° x 19° | PAL      |
| ZNT6-PAT2FN25-P                  | 30  | 18° x 13° | PAL      |
| ZNT6-PBT2FN21-P                  | 9   | 44° x 33° | PAL      |
| ZNT6-PBT2FN22-P                  | 9   | 37° x 28° | PAL      |
| ZNT6-PBT2FN24-P                  | 9   | 25° x 19° | PAL      |
| ZNT6-PBT2FN25-P                  | 9   | 18° x 13° | PAL      |

All specifications are subject to change without notice

9 Hz models are export controlled by the U.S. Department of Commerce under ECCN 6A993. 30 Hz models are export controlled by the U.S. Department of Commerce under ECCN 6A003b.4.b. The commodities described herein may require U.S. Government authorization prior to export or re-export.



Made in the USA

ONVIF™ and  ONVIF are trademarks of ONVIF Inc.