



## SPECIAL FEATURES

- 8ms Response, 250 NITS, 700:1
- 2D Comb Filter
- Video 1 In / 1 Out (BNC Type), S-Video 1 In / 1 Out, VGA 1 In, Audio 2 In (RCA Type), PC Stereo 1 In
- Two 2 Watt Built-In Speakers
- Multi-Language Support
- Wall and Ceiling Mount


## SPECIFICATIONS

		15RTV
Display	Screen Size	15 Inch
	Max. Resolution	1024 x 768 @ 75Hz
	Pixel Pitch	0.297 x 0.297mm
	Brightness	250cd/m <sup>2</sup>
	Contrast Ratio	700 : 1
	Aspect Ratio	4 : 3
	Viewing Angle (H/V)	140° / 125°
	Display Color	16.2 Million
	Response Time	< 8ms
	Video System	NTSC / PAL
Interface	Video In / Out (BNC Type)	1 / 1
	S-Video In / Out	1 / 1
	VGA In (15Pin D-Sub)	1
	Audio In (RCA Type)	2 (L + R)
	PC Stereo In	1
Transmitter	Remote Control	Optional
Audio	Built-in Speakers	Yes (2W x 2)
Features	Filter Type	2D Comb Filter
	Multi Language	English, Spanish, French
Dimension	Outline Dimension (w/o stand)	14.1" (W) x 11.14" (H) x 2.3" (D)
	Outline Dimension (w/ stand)	14.1" (W) x 13.21" (H) x 7.48" (D)
	Net Weight	2.3Kg (5.1lbs)
Cabinet	Color	Black
	Base Stand	Yes
	Tilt Function	Yes
Warranty	Part/Labor	2year / 2year
	MTBF (Approx.)	30,000 Hours
Regulations		RoHS, TUV-NRTL, CB, FCC(A), CE-Emc(LVD)
Power	Consumption. < On	< 35W
	Electrical Ratings	AC100 ~ 240V(50/60Hz) DC12V / 3A
Circumstance	Operating Temperature	0 ~ 50° C / 32 ~ 122 F
	Storage Temperature	-20 ~ 60° C / -4 ~ 140° F
Mounts	VESA® Mount Size	75 x 75mm (BS M4 x 10mm Screw)
	Wall	WB-5, WB-10, WB-30, WB-31
	Ceiling	CMK-01, RMK-08

\*Design and specifications are subject to change without notice

## DIMENSIONS

15RTV

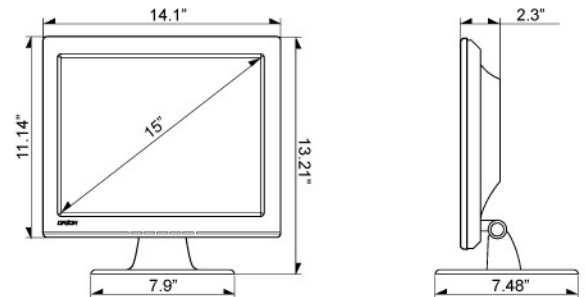

## TILT FUNCTION

