

For Security

# 1" ZOOM


Motor Drive  
Zoom  
Remote Iris

**FUJINON** CCTV LENS

C22×17A-M41



※A photograph is a similar model.

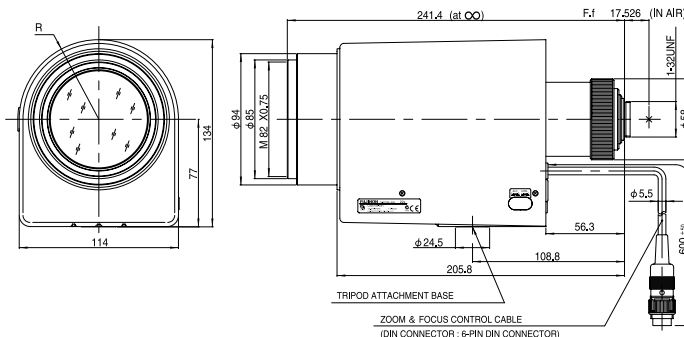

Unit : mm

Model		C22 × 17A-M41	
Focal Length		17mm ~ 374mm (22×)	
Iris Range		F2.3 ~ F22 • Close	
Operation	Iris	Motor Drive	
	Focus	Motor Drive	
	Zoom	Motor Drive	
ANGLE OF VIEW (H × V)	1"	Wide	41°16' × 31°32'
		Tele	1°58' × 1°28'
Focusing Range (From Front Of Lens)		∞ ~ 3m	
Object Dimensions at M.O.D. (H × V)	1"	Wide	2178mm × 1633mm
		Tele	99mm × 74mm
Back Focal Distance (in air)		66.93mm	
Filter Thread		M82 × 0.75mm	
Mount		C Mount	
Mass		2.5kg	
Exit Pupil Position (from Image Plane)		-127mm	
Standard Accessories		Conversion Cable (6-pin→4-pin) Connection Connector (4-pin) Connection Connector (6-pin)	

### Wiring

Diagram showing connections for Control Mode (IND.) and Lens. Includes labels for Iris (Close, Open), Zoom (Wide, Tele), Focus (Far, Near), Common, and Lens (6V, 12V, COM., IND.). Connectors include 4-PIN PLUG, 6-PIN RECEPTACLE, and 6-PIN DIN Connector.

コントローラ出力	6V	±6V	12V	±12V
選択スイッチセット位置	6V/IND.	6V/COM.	12V/IND.	12V/COM.
変換ケーブル	不要	要	不要	要

工場出荷時は、左図のように12V/INDに設定してあります。

例、±6Vコントロールの場合(変換ケーブルの接続が必要)

### Accessories

Extender	Model		Magnification					
		HE15-1		×1.5				
	HE20-1		×2					
Control Box	Model	Output Voltage	Operation	Maximum Output Current	Output Connector	Power Source	Power Consumption (at 100V AC)	Mass
	CRD-2A	6V DC/12V DC	Zoom, Focus	0.2A	Mab 6100	100V/120V/220V/240V AC, 50/60Hz	15W	2.1kg
	CRD-2B	±6V DC/±12V DC	Zoom, Focus	0.2A	Mab 4100	100V/120V/220V/240V AC, 50/60Hz	15W	2.1kg
Power Cord	Japan	U.S.A./Canada	Continental Europe	Australia	Without AC Plug			
	PCA-1	PCA-2	PCA-3	PCA-4	PCA-5			
Extension Cable	10m	CRD-2A		CEC-AA102-11	CRD-2B	CEC-AB102-11		
	20m			CEC-AA202-11		CEC-AB102-11		