


DC (DIRECT CONTROL)

DRIVE COIL	RESISTOR	190Ω (20°C)
BRAKE COIL	COLOR	RED(+) BLACK
DRIVE COIL	RESISTOR	1150Ω (20°C)
VOLT.	COLOR	YELLOW(+) GREEN
	OPEN	LESS THAN +4V
	CLOSE	OVER THAN 0V W/CLOSING SPRING

① IRIS CABLE

(+) GREEN	FOCUS NEAR
(+) BLACK	FOCUS FAR
(+) YELLOW	ZOOM IN
(+) RED	ZOOM OUT

② MOTOR CABLE

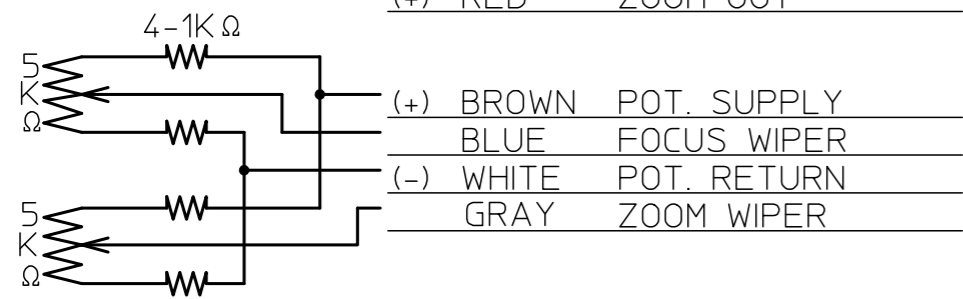

SPECIFICATION

1. USE	FOR 1/2" COLOR ,B/W CAMERA	
2. FOCAL LENGTH	f=12 ~ 300 mm	
3. IRIS MAX APERTURE	F=W 1.8	T 2.6
4. IRIS RANGE	F=1.8~1000	
5. IMAGE SIZE	φ 8 (6.4 x 4.8)	
6. BACK FOCAL LENGTH	15.84	mm in air
7. FLANGE FOCAL LENGTH	17.526	mm in air
8. FOCUS RANGE	∞ ~ 2.5 m	
9. FIELD OF VIEW AT M.O.D.	DIA.	(W) 36.5° (T) 1.54°
	HOL.	29.4° 1.24°
	VER.	22.2° 0.93°
10. FIELD OF VIEW AT M.O.D.	DIA.	mm mm
	HOL.	mm mm
	VER.	mm mm
11. DISTORTION TV	-0.47 %	0.28 %
12. CLEAR APERTURE	FRONT φ108	REAR φ14.5
13. EXIT PUPIL POSITION	1.5E+05 mm (format)	
14. WEIGHT	2.5kg	

MOTOR

INPUT VOLT	DC 6V~12V
ZOOM SPEED	approx 14sec/DC8V
ZOOM CURRENT	max 25mA/DC8
FOCUS SPEED	approx 12sec/DC8V
FOCUS CURRENT	max 25mA/DC8
OPERATE TEMPT	-10~+50°C

品名	1/2" F1.8/12-300mm NEW IRIS
	LMZ123AM/AMP
	LMZ123AMDC/AMPDC
部番	