


产品技术规格书 (Product Technical Specification)

No.	名称 (Name)	规格 (Specification)	No.	名称 (Name)	规格 (Specification)												
1	型号 (Model)	AZURE-1236ZM-IV	13	视场角 F.O.V(DxVxH)	<table border="1"> <tr> <td>mm</td> <td>D</td> <td>H</td> <td>V</td> </tr> <tr> <td>长焦</td> <td>16.7</td> <td>13.6</td> <td>10.3</td> </tr> <tr> <td>短焦</td> <td>49.8</td> <td>40.4</td> <td>30.6</td> </tr> </table>	mm	D	H	V	长焦	16.7	13.6	10.3	短焦	49.8	40.4	30.6
mm	D	H			V												
长焦	16.7	13.6			10.3												
短焦	49.8	40.4	30.6														
2	物料代码 (Material Code)	3. A01.04M123604A1															
3	靶面格式 (Image Format)	2/3"															
4	分辨率 (Resolution)	2MP	14	滤镜尺寸 (Filter Thread)	M35.5×0.5												
5	焦距 (Focal Length)	12~36mm	15	接口 (Mount)	C												
6	后截距 (Back Focus)	11.06mm	16	适用物距 (Suitable Distance)	0.1~∞m												
7	F值 (F/No.)	2.8	17	最佳物距 (Optimum Working Distance)	2m												
8	光圈 (Iris Type)	Manual	18	镀膜 (Coating)	400nm~900nm												
9	畸变 (Distortion)	-3.6%~3.5%	19	外形尺寸 (Dimension)	φ38.5×53.97mm												
10	通光口径 (Lens Effective Diameter)	前面 (Front)	φ31.73mm	20	重量 (Weight)	140g											
		后面 (Back)	φ11.08mm	21	工作温度 (Operating Temperature)	-20°C~+65°C											
11	相对照度 (Relative Illuminate)	61.9%	22	镜头组成 (Lens Construction)	12-9												
12	光学总长 (TTL)	68.7mm	23	最大主光线入射角 (CRA)	8.53°												

Size:

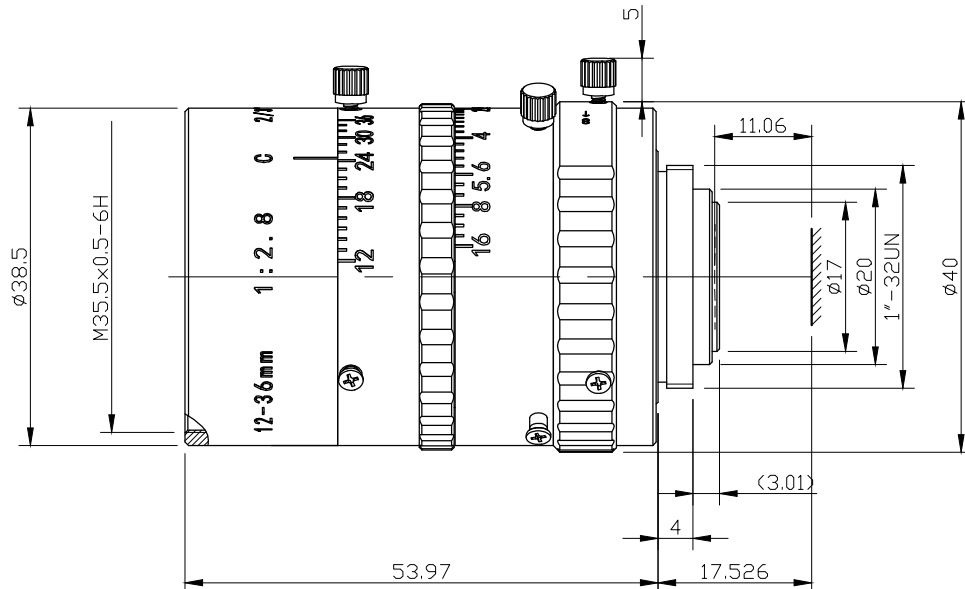

Unit:mm

Draw	Check	Recheck	Approval	福建浩蓝光电有限公司 AZURE Photonics Co.,Ltd