


产品技术规格书
(Product Technical Specification)

No.	名称(Name)	规格(Specification)	No.	名称(Name)	规格(Specification)			
1	型号(Model)	AZURE-2428TLS	14	视场角 F.O.V(DxVxH)	"	1.8	4/3	1
2	物料代码(Material Code)	3.A01.012428TLS			D	61.96	50.23	36.87
3	靶面格式(Image Format)	30mm			H	53.56	41.11	29.86
4	分辨率(Resolution)	70lp/mm			V	37.2	31.42	22.62
5	焦距(Focal Length)	24mm	15	接口(Mount)	F(3CCD)			
6	后截距(Back Focus)	36.48mm	16	适用物距 (Suitable Distance)	0.3~∞m			
7	F值(F/ No.)	2.8	17	最佳物距 (Optimum Working Distance)	1.15m			
8	光圈(Iris Type)	Manual	18	镀膜(Coating)	400nm~950nm			
9	畸变(Distortion)	<0.5%	19	外形尺寸(Dimention)	Φ 58×109.61mm			
10	通光口径 (Lens Effective Diameter)	前面(Front) Φ 45.06mm	20	重量(Weight)	589g			
		后面(Back) Φ 37.33mm	21	工作温度 (Operating Temperature)	-20°C ~ +65°C			
11	相对照度 (Relative Illuminate)	58.8%	22	镜头组成 (Lens Construction)	13~10			
12	光学总长(TTL)	167mm	23	最大主光线入射角 (CRA)	0.41°			
13	设计波长(Design Wavelength)	400~950nm	24	滤镜尺寸(Filter Thread)	M55×0.75			

Size:

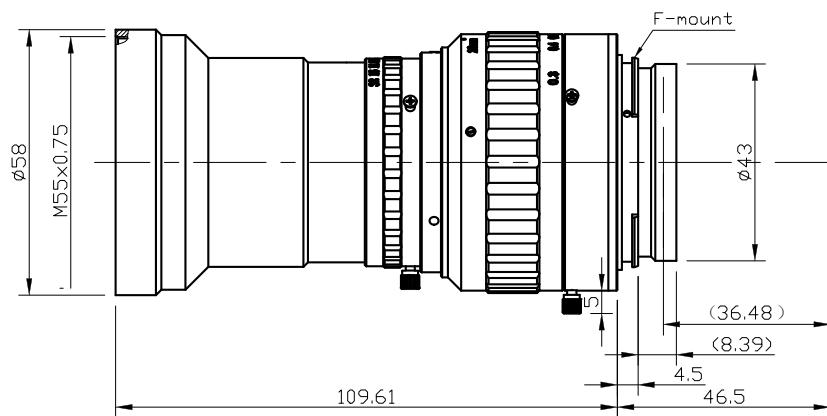

Unit:mm

Draw	Check	Recheck	Approval	福建浩蓝光电有限公司 AZURE Photonics Co.,Ltd