


## 产品技术规格书 (Product Technical Specification)

No.	名称 (Name)	规格 (Specification)	No.	名称 (Name)	规格 (Specification)	
1	型号 (Model)	AZURE-DN2012MML	14	视场角 F.O.V.(DxVxH)	1" 1 2/3 1/2	
2	物料代码 (Material Code)	3. A01. 01M2012L1A0			D	45.4 30.74 22.62
3	靶面格式 (Image Format)	1"			H	33.18 24.81 18.18
4	分辨率 (Resolution)	10MP			V	26.2 18.74 13.69
5	焦距 (Focal Length)	20mm	15	接口 (Mount)	C	
6	后截距 (Back Focus)	12.26mm	16	适用物距 (Suitable Distance)	1-∞m	
7	F值 (F/No.)	1.2	17	最佳物距 (Optimum Working Distance)	∞	
8	光圈 (Iris Type)	Manual	18	镀膜 (Coating)	400nm-1000nm	
9	畸变 (Distortion)	<-4.0%	19	外形尺寸 (Dimension)	φ53×90.65mm	
10	通光口径 (Lens Effective Diameter)	前面 (Front)	φ34.82mm	20	重量 (Weight)	g
		后面 (Back)	φ17.37mm	21	工作温度 (Operating Temperature)	-20°C~+65°C
11	相对照度 (Relative Illuminate)	42%	22	镜头组成 (Lens Construction)	13-6	
12	光学总长 (TTL)	106.49mm	23	最大主光线入射角 (CRA)	5.48°	
13	设计波长 (Design Wavelength)	400~1000nm	24	滤镜尺寸 (Filter Thread)	M43×0.75	

Size:

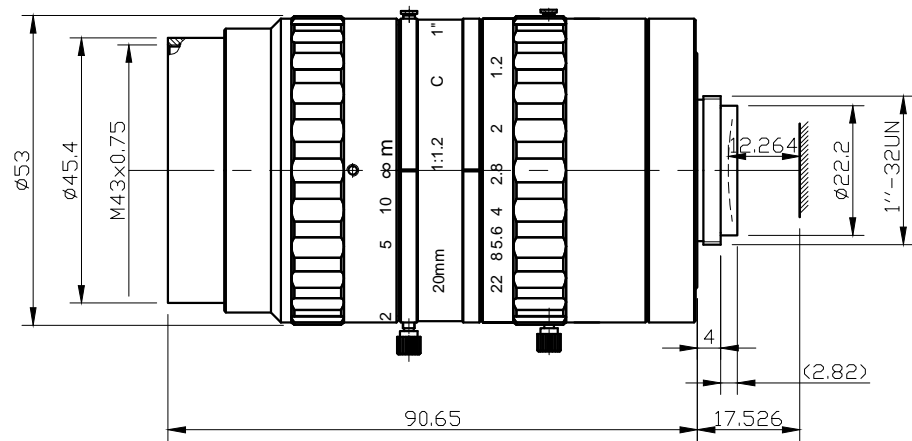

Unit:mm

Draw	Check	Recheck	Approval	福建浩蓝光电有限公司 AZURE Photonics Co.,Ltd