

CoaXpress Cameras




Pregius **STARVIS**



Key Features


Mini-size CMOS CoaXpress camera
 Camera standard
 - GenICam, CoaXpress
 Trigger input range : +3.3V~24V(Photo coupler)
 PoCXP 지원

Dimension (Unit : mm)

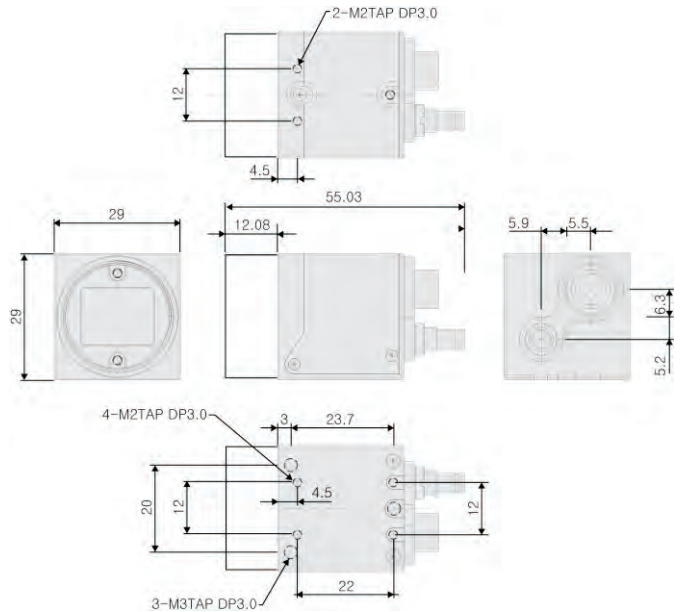

Pin map

Pin No.	Name	IN/OUT	Description
1	Power	IN	12V ~ 24V ± 10%
2	Line1	IN	Opto-Isolated input, Trigger input
3	Line2GND	OUT	Line2 GND (Strobe)
4	Line2	OUT	Opto-Isolated Output, Strobe Output
5	Line1GND	IN	Line1 GND (Trigger)
6	GND	IN	Power GND



back Panel



No.	Name	Remark
1	CoaXpress Connector	DIN
2	Power & I/O Connector	6Pin Circular
3,4	LED Indicator	LED

LED Indicator

State	Indication
No power	Off
System booting	Solid orange
Powered, but nothing connected	Slow pulse red
no data being transferred	Solid green
Waiting for event	Slow pulse orange
Data being transferred	Fast flash green