

MV-CH1510-10XM/C-M72-NF

151 MP CMOS CoaXPress Area Scan Camera



GEN*i*CAM

CoaXPress®


Introduction

MV-CH1510-10XM/C-M72-NF camera adopts Sony® IMX411 sensor to provide high-quality image. It uses the CoaXPress interface to transmit non-compressed images in real time, and its max. frame rate can reach 6.2 fps in full resolution.

Key Feature

- Resolution of 14208×10640 , and pixel size of $3.76 \mu\text{m} \times 3.76 \mu\text{m}$.
- Adopts rolling shutter CMOS to provide high dynamic range, SNR, and high-quality image.
- Adopts CoaXPress interface to transmit data.
- Supports the flat field correction.
- Compatible with CoaXPress Protocol, GenICam Standard, third-party software based on the protocol and standard.

Dimension

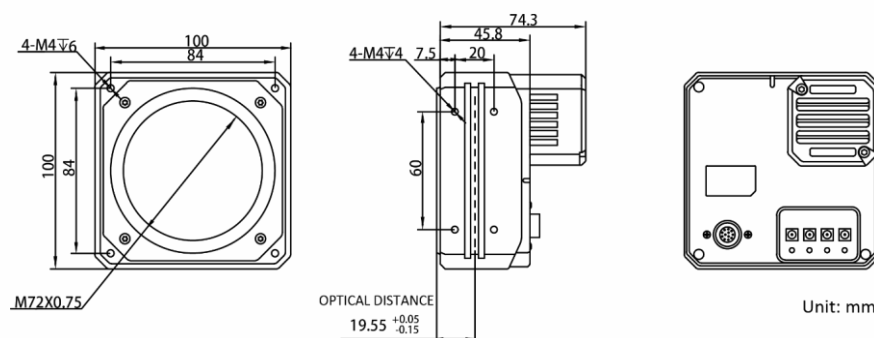


Available Model

- Mono camera: MV-CH1510-10XM-M72-NF
- Color camera: MV-CH1510-10XC-M72-NF


Applicable Industry

PCB AOI, FPD, high-accuracy measurement, etc.

Sensor Quantum Efficiency

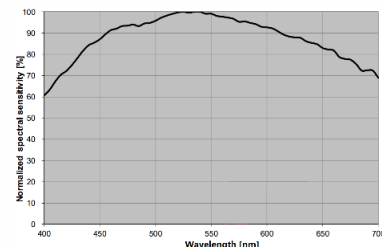

MV-CH1510-10XM-M72-NF

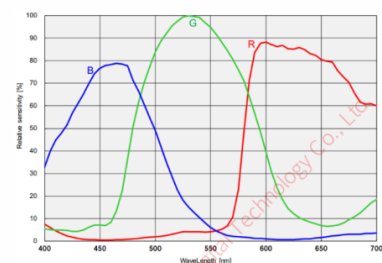

MV-CH1510-10XC-M72-NF



Specification

Model	MV-CH1510-10XM-M72-NF	MV-CH1510-10XC-M72-NF
Camera		
Sensor type	Rolling shutter CMOS	
Sensor model	Sony® IMX411	
Pixel size	3.76 μm × 3.76 μm	
Sensor size	66.7 mm	
Resolution	14208 × 10640	
Max. frame rate	6.2 fps @14208 × 10640 Mono 8	6.2 fps @14208 × 10640 Bayer RG 8
Dynamic range	78.7 dB	
SNR	46.4 dB	
Gain	0 dB to 30 dB	0 dB to 36 dB
Exposure time	15 μs to 10 s	
Exposure mode	Off/Once/Continuous exposure mode	
Sensor shutter mode	Supports Global Reset, Rolling	
Mono/color	Mono	Color
Pixel format	Mono 8/10/12/16	Mono 8/10/12/16, Bayer RG 8/10/12/16, RGB 8
Binning	Supports 1 × 1, 1 × 2, 1 × 4, 2 × 1, 2 × 2, 2 × 4, 4 × 1, 4 × 2, 4 × 4	
Decimation	Not support	
Reverse image	Supports horizontal reverse image output	
Electrical features		
Data interface	CoaXPress with DIN interface	
Digital I/O	12-pin Hirose connector provides I/O, including opto-isolated input × 1 (Line 0), opto-isolated output × 1(Line 1), bi-directional non-isolated I/O × 1 (Line 2), and RS-232 × 1.	
Power supply	12 VDC to 24 VDC	
Power consumption	Typ. 18 W@24 VDC	Typ. 21 W@24 VDC
Structure		
Lens mount	M72*0.75, optical back focal length 19.55 mm (0.8")	
Dimension	100 mm × 100 mm × 74.3 mm (3.9" × 3.9" × 2.9")	
Weight	Approx. 1 kg (2.2 lb.)	
Ingress protection	IP40 (under proper lens installation and wiring)	
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)	
Humidity	20% to 95% RH, non-condensing	
General		
Client software	Frame grabber software meeting with CoaXPress Protocol	
Operating system	32/64-bit Windows 7/10 with 8 GB memory or above	
Compatibility	CoaXPress, GenICam	
Certification	CE, FCC, RoHS, KC	

HIKROBOT

Hangzhou Hikrobot Technology Co., Ltd.

No.399 Danfeng Road, Binjiang District, Hangzhou 310051, China.

en.hikrobotics.com

Copyright Hikrobot

Hangzhou Hikrobot Technology Co., Ltd. All Rights Reserved. Hangzhou Hikrobot Technology does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.