

# Ikegami

## ICD-879S

1/2" Ultra Low Light  
Full HD WDR Camera



Pictured with  
Optional Lens


### Features:

- 1/2" Ultra Low Light CMOS Image Sensor
- 1080P Full HD Hybrid Output support  
CVBS (Default), 1080P Full HD Hybrid Output CVI,TVI,AHD
- Natural Color Reproduction and clear & vivid image
- Enhance Local Real-time Surveillance Image Quality
- Wide Dynamic Range Compensation (120dB)


DOL(Digital OverLap) Image Sensor



- Ultra low light performance

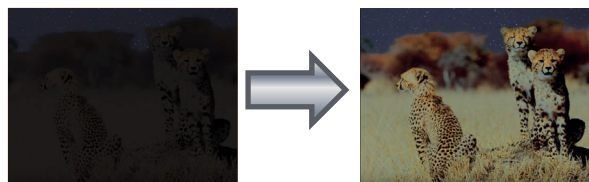

### Dimensions:

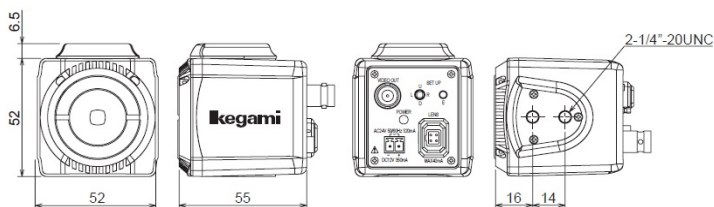

### Specifications:

Image Sensor	1/2" 2 Mega Pixels CMOS Sensor
HD Resolution	Full HD (1920(H) x 1080(V))
Frame Rate	1080P-Full HD (30FPS/25FPS)
Scanning system	16:9 Progressive Scan
Video Output	Analog Output - CVBS (default) HD Output - CVI,TVI,AHD
Min.Illumination;F1.2	Color 0.07Lux, B/W 0.0047Lux (sens up « off »)
S/N Ratio	More than 52dB (AGC off)
Wide Dynamic Range	Support (120dB)
White Balance	AUTO / AUTO ext / PUSH / MANUAL
Electronic shutter	Auto,Manual,Flicker,1/30.000 sec maxiam
Digital Noise Reduction	2D+3D, OFF/LOW/MIDDLE/HIGH
Motion Detection	4 Areas (On/Off, Position)
Privacy Mask	16 Areas (On/Off, Color, Position)
Day & Night	True Day/night (Auto/Day/B&W/EXT)
ACE	Off/LOW/MIDDLE/HIGH
D-Zoom	1.0X ~ 16.0X
Lens Shading	Off/ON
Operating Temperature / Humidity	-10°C ~ +50°C RH 30% to 90% (no condensation)
Power Consumption	AC 24V ±10%, DC 12V(+10.5V~+15V), 4.0W
Outer dimensions	52(W)×52(H)×55(D) mm
Weight	Approx. 350g

Design and Specifications are subject to Change without notice.

**IKEGAMI ELECTRONICS, (U.S.A.) INC.**

www.ikegami.com email: CCTV@ikegami.com

HEADQUARTERS: 300E Route 175, Mahwah, NJ 07430 Phone (201)368-9171 Fax (201)569-1626