

This compact and fast F-Mount lens is designed for large sensors up to 43.2 mm diagonal/length. It is optimized for a working distance range from 0.3 m to 2.0 m but can be used in many cases also for longer working distances. The robust mechanics and a special focus setting and locking mechanism ensures highest mechanical stability even in harsh environment.

## Key features

- F-Mount
- 43.2 mm image circle
- Optimized for short working distances
- 400-1000 nm broadband AR-coating

## Applications


- Machine Vision
- AOI (Automated Optical Inspection)
- Web inspection
- Factory automation

## Technical specifications


|  |                |
|--|----------------|
| Type [standard]                                    | F              |
| ID [standard]                                      | 1062672        |
| Interface  | F-Mount        |
| Focal length [mm]                                  | 50             |
| F/# range  | F/2.2 ... F/16 |
| Numerical aperture [object   image]                | -   0.21       |
| Max. sensor size [mm]                              | 43.2           |
| Max. angle of view [°]                             | 45             |
| Rec. magnification range                           | -0.17 ... 0    |
| Rec. working distance range [mm]                   | 327 ... ∞      |
| Min. working distance without extension tubes [mm] | 155            |
| Filter thread [mm]                                 | M43 x 0.75     |
| Storage temperature [°C]                           | -25 ... +70    |
| Net. weight [standard] [g]                         | 196            |
| Additional info                                    | -              |
| f'eff [mm]   | 51.21          |
| SF [mm]  | -23.75         |
| S'F' [mm]  | 32.17          |
| HH' [mm]   | -10.90         |
| β'P  | 1.07           |
| SEP [mm]   | 23.94          |
| S'AP [mm]  | -22.81         |
| Σd [mm]  | 35.59          |

## MTF charts


| Spectrum name    | VIS |     |     |     |     |     |
|------------------|-----|-----|-----|-----|-----|-----|
| Wavelengths [nm] | 425 | 475 | 525 | 575 | 625 | 675 |
| Rel. weights [%] | 8   | 16  | 23  | 22  | 19  | 13  |

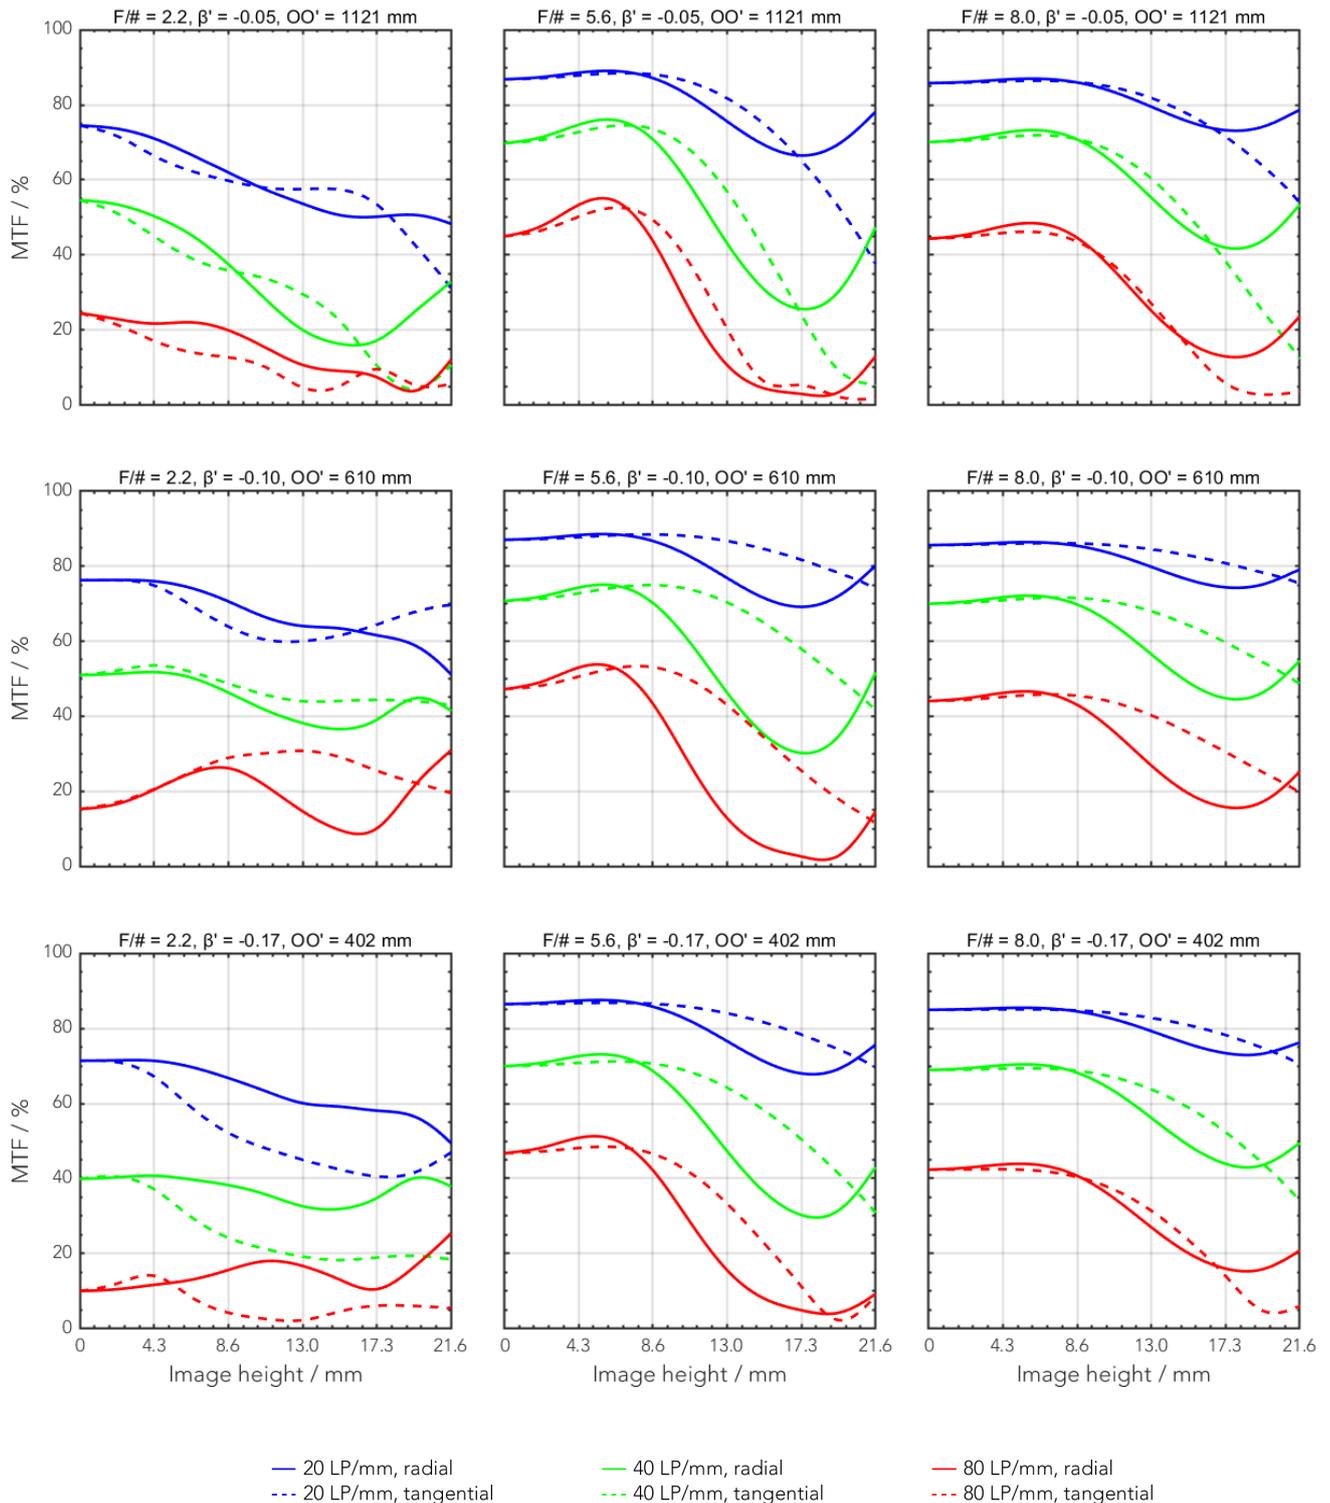


## Rel. illumination vs. image height

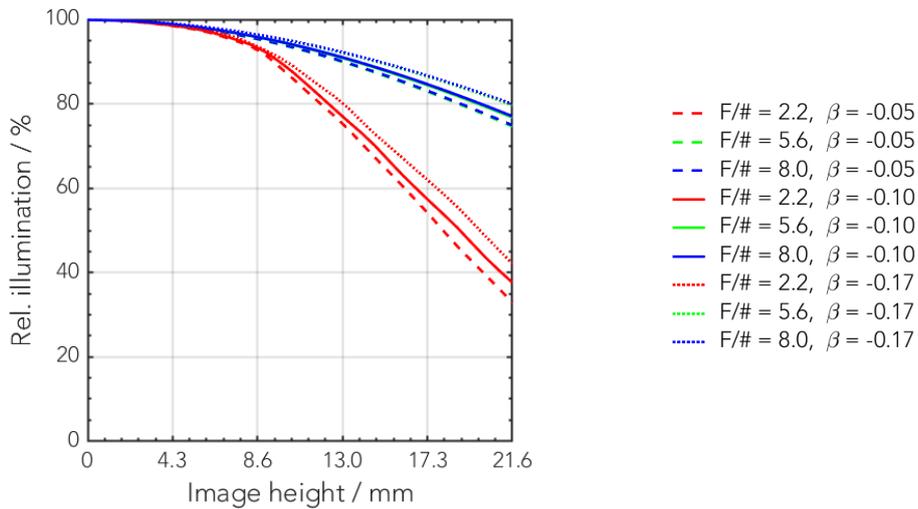


## Distortion vs. image height

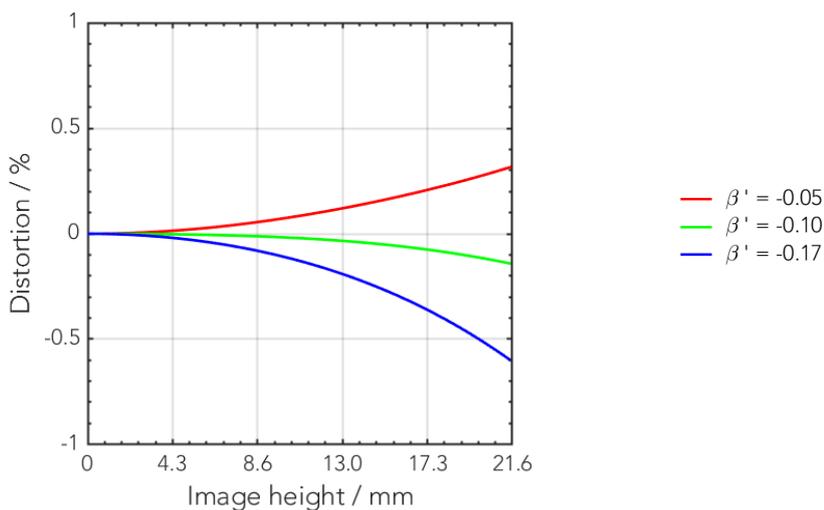

## Transmittance vs. wavelength

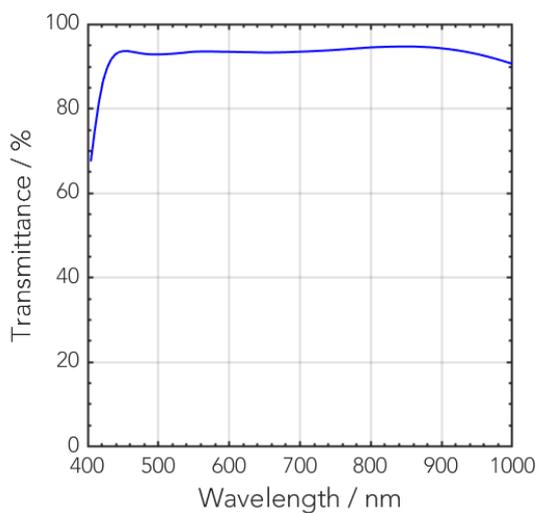

## Technical drawings

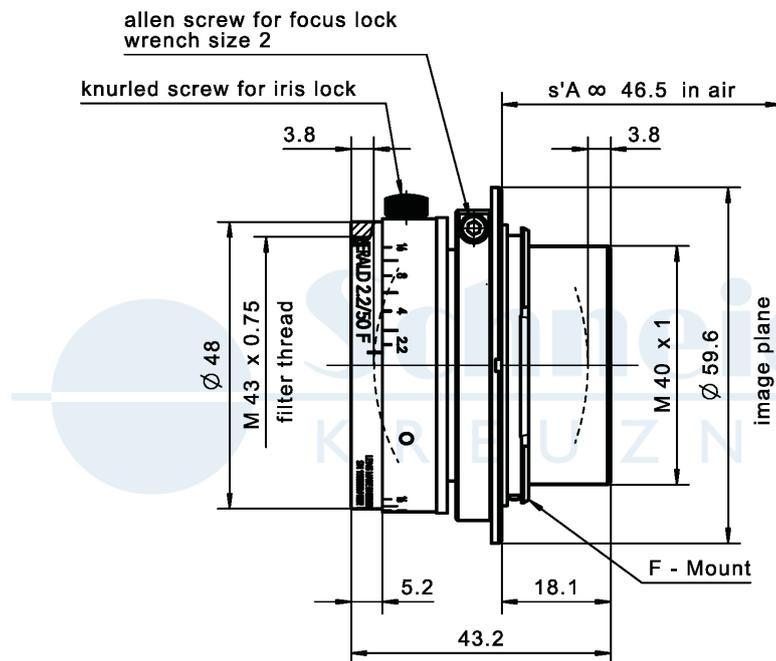

| Annotation                   |   |
|------------------------------|---|
| Focal length                 | Nominal focal length  |
| F/# range                    | Image space F-number range for infinity focus position  |
| Numerical aperture           | Maximum real numerical aperture (depending on recommended magnification range either for infinity or respective fixed magnification)                              |
| Max. sensor size             | Image circle diameter   |
| Max. angle of view           | Angle of view associated with maximum sensor size (depending on recommended magnification range either for infinity or respective fixed magnification)            |
| Rec. magnification range     | Magnification range as recommended by Schneider-Kreuznach   |
| Rec. working distance range  | Working distance, i.e. distance between object and first mechanical element, associated with recommended magnification range                                      |
| Max. mechanical focus travel | Maximum possible movement of the lens from infinity position (depending on recommended magnification range either for infinity or respective fixed magnification) |
| Net weight                   | weight of unpacked lens without lens cap  |
| $f'_{\text{eff}}$            | Effective focal length  |
| SF                           | Distance between vertex of first lens surface and object space focal point  |
| S'F'                         | Distance between vertex of last lens surface and image space focal point (back focal distance at infinity)  |
| HH'                          | Distance between principal planes   |
| $\beta'P$                    | Pupil magnification (= exit pupil diameter / entrance pupil diameter)   |
| SEP                          | Distance between vertex of first lens surface and entrance pupil  |
| S'AP                         | Distance between vertex of last lens surface and exit pupil   |
| $\Sigma d$                   | Distance between vertices of first and last lens surface  |
| s'A                          | Flange focal distance (in air) for infinite object distance (depending on recommended magnification range either for infinity or respective fixed magnification)  |
| $\beta'$                     | Magnification (= image size / object size), negative value because image is inverted  |
| OO'                          | Distance between object and image   |

Unless otherwise stated all dimensions in this data sheet are in mm.

## Headquarters Europe

### **Jos. Schneider Optische Werke GmbH**

Ringstraße 132

55543 Bad Kreuznach

☎ +49 671 601 205

✉ [cs@schneiderkreuznach.com](mailto:cs@schneiderkreuznach.com)

[www.schneiderkreuznach.com](http://www.schneiderkreuznach.com)

## Offices Worldwide

### **America**

☎ +1 800 645 7239 (East Coast)

☎ +1 800 228 1254 (West Coast)

✉ [info@schneideroptics.com](mailto:info@schneideroptics.com)

### **Asia**

☎ +86 755 8832 1170

✉ [info@schneider-asiapacific.com](mailto:info@schneider-asiapacific.com)