

## MV-CA023-10UM/UC 2.3MP, 1/1.2" CMOS, USB 3.0 Camera



The Hikvision MV-CA023-10UM/UC 2.3 MP 1/1.2" CMOS USB 3.0 Camera is a high quality device that can be used in a variety of applications, including electronic semiconductor fabrication, factory automation, bottle inspection and medical packaging.


### Key Features

- Supports auto exposure control, user defined LUT and gamma correction.
- Cameras can be synchronized with hard trigger and soft trigger. Different exposure modes supported.
- Compact structure with the size of 29mm×29mm×30mm, suitable for tight mounting requirement.
- The USB3.0 interface is tightly locked to prevent accidental unplugging and dropping.
- Compatible with USB 3.0 Vision V1.0.


### Application Scenarios

- Electronic semiconductor
- Factory automation
- Bottle inspection
- Medical packaging

### Spectral Response

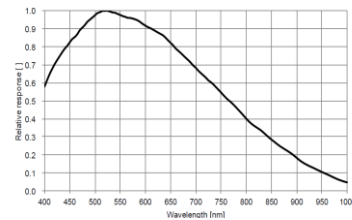

### MV-CA023-10UM Quantum Efficiency

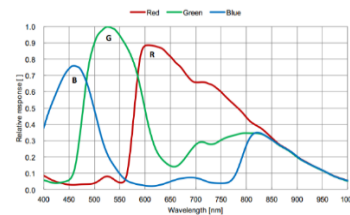

### MV-CA023-10UC Quantum Efficiency

### Order Models

Mono: MV-CA023-10UM

Color: MV-CA023-10UC



## Specifications

Model	MV-CA023-10UM	MV-CA023-10UC
Parameters	2.3MP, 1/1.2" CMOS, USB 3.0 Camera	
<b>Camera</b>		
Sensor	IMX249	
Pixel Size	5.86μm×5.86μm	
Sensor Size	1/1.2"	
Resolution	1920×1200	
Frame Rate	41fps	40fps
Dynamic Range	>70dB	
SNR	>40dB	
Gain Range	0-20dB	
Exposure Time	34μs-10sec	
Shutter Mode	Global shutter. Auto-exposure, Manual exposure, and One-key exposure	
Data Interface	USB 3.0	
General Purpose I/O	Opto-isolated input x1, Opto-isolated output x1, Bi-directional non-isolated I/O x1	
Data Format	Mono 8/10/10p/12/12p	Mono8/10/12, Bayer RG 8/10/10p/12/12p, YUV422_YUYV_Packed, YUV422_Packed, RGB8
<b>General</b>		
Power	<2.52W@12VDC, Voltage 5~15VDC, USB 3.0 power supply supported	
Temperature	Working Temperature 0~50°C, Storage Temperature -30~70°C	
Humidity	20%-80% RH without condensation	
Dimension	29mm×29mm×30mm	
Weight	<56g	
Lens Interface	C-Mount	
Software	MVS or Third-Party Software supporting USB 3.0 Vision Protocol	
Operating System	Windows XP/7/10 32/64bits	
Compliance	USB 3.0 Vision	
Certification	CE, FCC, RoHS	

### Recommended Accessories

- **Power:** 12VDC @1A power adapter
- **Cable:** Micro USB 3.0 cable (B Type) recommended

### Dimensions

