

MV-CE050-30GM 5MP, 1/2.5" CMOS, GigE Camera

GigE
VISION



The Hikvision MV-CE050-30GM 5 MP 1/2.5" CMOS GigE Camera is a high quality device that can be used in a variety of applications, including electronic semiconductor fabrication, factory automation, quality inspection.


Key Features

- Gigabit Ethernet interface providing 1Gbps bandwidth; Transmitting distance can be 100m without relaying.
- 128MB on-board buffer, for image burst transmitting and retransmitting.
- Support auto exposure control, LUT and Gamma correction.
- Cameras can be synchronized with hard trigger and soft trigger.
- Different exposure modes can be used to capture image.
- Compliant with GigE Vision V1.2, can be supported by third party software.

Application Scenarios

- Electronic semiconductor
- Factory automation
- Quality Inspection

Spectral Response

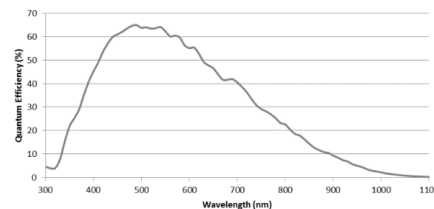

MV-CE050-30GM Quantum Efficiency

Order Model

Mono: MV-CE050-30GM



Specifications

Model	MV-CE050-30GM
Parameters	5MP, 1/2.5" CMOS, GigE Camera
Camera	
Sensor	MT9P031
Pixel Size	2.2μm×2.2μm
Sensor Size	1/2.5"
Resolution	2592×1944
Frame Rate	14fps
Dynamic Range	60dB
SNR	38dB
Gain Range	0-20dB
Exposure Time	34μs-1sec
Shutter Mode	Rolling Shutter. Auto-Exposure, Manual Exposure, One-key Exposure
Data Interface	Gigabit Ethernet
General Purpose I/O	Opto-isolated input x1, Opto-isolated output x1, Bi-directional non-isolated I/O x1
Image Buffer	128MB
Data Format	Mono 8/10/10p/12/12p
General	
Power	<2.75W@12VDC, Voltage 5~15VDC, PoE supported
Temperature	Working Temperature 0~50°C, Storage Temperature -30~70°C
Humidity	20%-80% RH without condensation
Dimension	29mm×29mm×42mm
Weight	<68g
Lens Interface	C-Mount
Software	MVS or Third-Party Software supporting GigE Vision Protocol
Operating System	Windows XP/7/10 32/64bits
Compliance	GigE Vision
Certification	CE, FCC, RoHS

Recommended Accessories

- **Power:** 12VDC @1A power adapter
- **NIC:** Intel Pro1000 and above version recommended
- **Network Cable:** CAT5e or CAT6 network cable recommended

Dimensions

