

MV-CH089-10GM/GC 8.9MP, 1" CMOS, GigE Camera

GigE
VISION



The Hikvision MV-CH089-10GM/GC 8.9 MP 1" CMOS GigE Camera is a high quality device that can be used in a variety of applications, including electronic semiconductor fabrication, factory automation, logistics code reading, drink/wine bottle detection, medicine pack detection and etc.


Key Features

- Gigabit Ethernet interface providing 1Gbps bandwidth; Transmitting distance can be 100m without relaying.
- 128MB on-board buffer, for image burst transmitting and retransmitting.
- Support auto exposure control, LUT and Gamma correction.
- Cameras can be synchronized with hard trigger and soft trigger.
- Different exposure modes can be used to capture image.
- Embed special color interpolation algorithm which reproduces color performance better and supports auto white balance function.
- Compliant with GigE Vision V1.2, can be supported by third party software.


Application Scenarios

- Electronic semiconductor fabrication
- Factory automation
- Logistics code reading
- Drink/Wine bottle detection
- Medicine pack detection

Spectral Response

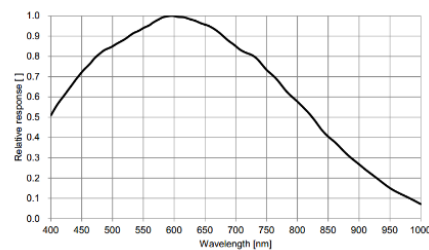

MV-CH089-10GM Quantum Efficiency

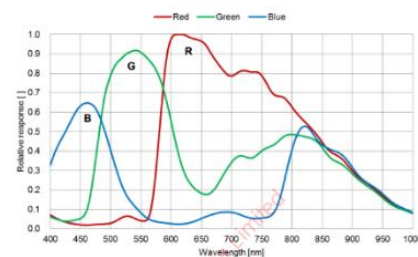

MV-CH089-10GC Quantum Efficiency

Order Models

Mono: MV-CH089-10GM

Color: MV-CH089-10GC



Specifications

Model	MV-CH089-10GM	MV-CH089-10GC
Parameters	8.9MP, 1" CMOS, GigE Camera	
Camera		
Sensor	IMX267	
Pixel Size	3.45μm×3.45μm	
Sensor Size	1"	
Resolution	4096×2160	
Frame Rate	13fps	
Dynamic Range	72.8dB	
SNR	40dB	
Gain Range	0-20dB	
Exposure Time	50μs-10sec	
Shutter Mode	Global Shutter. Auto-Exposure, Manual Exposure, One-key Exposure	
Data Interface	Gigabit Ethernet	
General Purpose I/O	Opto-isolated input x1, Opto-isolated output x1, Bi-directional non-isolated I/O x1	
Image Buffer	128MB	
Data Format	Mono 8/10/10p/12/12p	Mono 8/10/12, Bayer RG 8/10/10p/12/12p, YUV 422 (YUYV) Packed, YUV 422 Packed, RGB 8
General		
Power	Approx. 3.72W@12VDC, Voltage 12VDC	
Temperature	Working Temperature 0~50°C, Storage Temperature -30~70°C	
Dimension	44mm×29mm×59mm	
Weight	Approx. 100g	
Lens Interface	C-Mount	
Software	MVS or Third-Party Software supporting GigE Vision Protocol	
Operating System	Windows XP/7/10 32/64bits	
Compliance	GigE Vision	
Certification	CE, FCC, RoHS	

Recommended Accessories

- **Power:** 12VDC @1A power adapter
- **NIC:** Intel Pro1000 and above version recommended
- **Network Cable:** CAT5e or CAT6 network cable recommended

Dimensions

