


产品技术规格书 (Product Technical Specification)

No.	名称 (Name)	规格 (Specification)	No.	名称 (Name)	规格 (Specification)	
1	型号 (Model)	AZURE-3528TLS	14	视场角 F.O.V(DxVxH)	1.8 4/3 1	
2	物料代码 (Material Code)	3. A01. 013528TLS			D	46 35.64 25.75
3	靶面格式 (Image Format)	30mm			H	39.2 28.84 20.57
4	分辨率 (Resolution)	70lp/mm			V	26.6 21.83 15.62
5	焦距 (Focal Length)	35mm	15	接口 (Mount)	F (3CCD)	
6	后截距 (Back Focus)	36.569mm	16	适用物距 (Suitable Distance)	0.5-∞m	
7	F值 (F/No.)	2.8	17	最佳物距 (Optimum Working Distance)	0.9m	
8	光圈 (Iris Type)	Manual	18	镀膜 (Coating)	400nm-950nm	
9	畸变 (Distortion)	<0.3%	19	外形尺寸 (Dimension)	φ56.6×108.7mm	
10	通光口径 (Lens Effective Diameter)	前面 (Front)	φ38.01mm	20	重量 (Weight)	809g
		后面 (Back)	φ38.00mm	21	工作温度 (Operating Temperature)	-20℃~+65℃
11	相对照度 (Relative Illuminate)	70.5%	22	镜头组成 (Lens Construction)	12-8	
12	光学总长 (TTL)	164mm	23	最大主光线入射角 (CRA)	0.57°	
13	设计波长 (Design Wavelength)	400~950nm	24	滤镜尺寸 (Filter Thread)	M52×0.75	

Size:

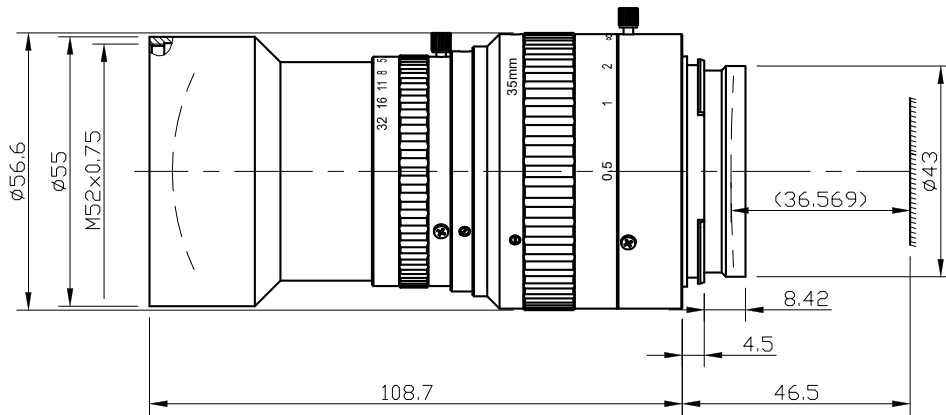

Unit:mm

Draw	Check	Recheck	Approval	福建浩蓝光电有限公司 AZURE Photonics Co.,Ltd