


① IRIS CABLE

(+)	RED	INPUT VOLTAGE
(-)	BLACK	GROUND
	WHITE	VIDEO SIGNAL
	GREEN	REMOTE CONTROL

② MOTOR CABLE

(+)	GREEN	FOCUS NEAR
(+)	BLACK	FOCUS FAR
(+)	YELLOW	ZOOM IN
(+)	RED	ZOOM OUT

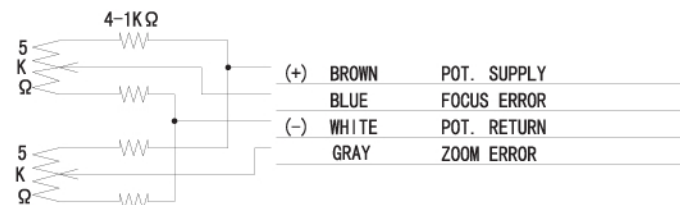


SPECIFICATION

1.	USE	FOR 1/3" COLOR, B/W CAMERA	
2.	FOCAL LENGTH	f= 5.5 ~ 165 mm	
3.	IRIS RANGE	F=1.8 ~ 500 ~ Close	
4.	IMAGE SIZE	ϕ 6 (4.8x3.6)	
5.	BACK FOCAL LENGTH	15.5 mm in air	
6.	FLANGE FOCAL LENGTH	12.5 mm in air	
7.	FOCUS RANGE	∞ ~ 1.8 m	
8.	FIELD ANGLE	DIA.	(W) 58.7 ° (T) 2.10 °
		HOL.	47.6 ° 1.70 °
		VER.	33.9 ° 1.30 °
9.	FIELD OF VIEW AT M.O.D.	DIA.	1,879 mm 62.8 mm
		HOL.	1,492 mm 50.6 mm
		VER.	1,107 mm 38.1 mm
10.	DISTORTION	-2.5 % 0.7 %	
11.	LENS CONSTRUCTION	12 GROUPS 14 ELEMENTS	
12.	CLEAR APERTURE	FRONT ϕ 60	REAR ϕ 10.5
13.	EXIT PUPIL POSITION	-70.0 mm (format)	
14.	WEIGHT	850 g (880g)	

DC (DIRECT CONTROL)

DRIVE COIL	RESISTOR	190 Ω	(20° C)
	COLOR	RED(+)	BLACK
BRAKE COIL	RESISTOR	1150 Ω	(20° C)
	COLOR	YELLOW(+)	GREEN
DRIVE VOLT.	OPEN	LESS THAN +4V	
	CLOSE	OVER THAN 0V W/CLOSING SPRING	



AUTO IRIS
1/3" F1.8/5.5~165mm

LMZ300AMP
LMZ300AMPDC